


NO VENDOR SUPPLYING PARTS TO APPLIED COMFORT PRODUCTS' SPECIFICATIONS UNLESS THE DRAWING SHALL REVEAL ANY PHYSICAL, DIMENSIONAL, MATERIAL, OR PERFORMANCE CHARACTERISTICS OF SUCH PARTS. APPLIED COMFORT PRODUCTS' APPROVAL OF SUCH VENDOR'S SAMPLES THEREOF UNLESS OTHERWISE AUTHORIZED IN WRITING BY APPLIED COMFORT PRODUCTS' PRODUCT ENGINEERING GROUP.




SECTION A-A

VIEW 'X'

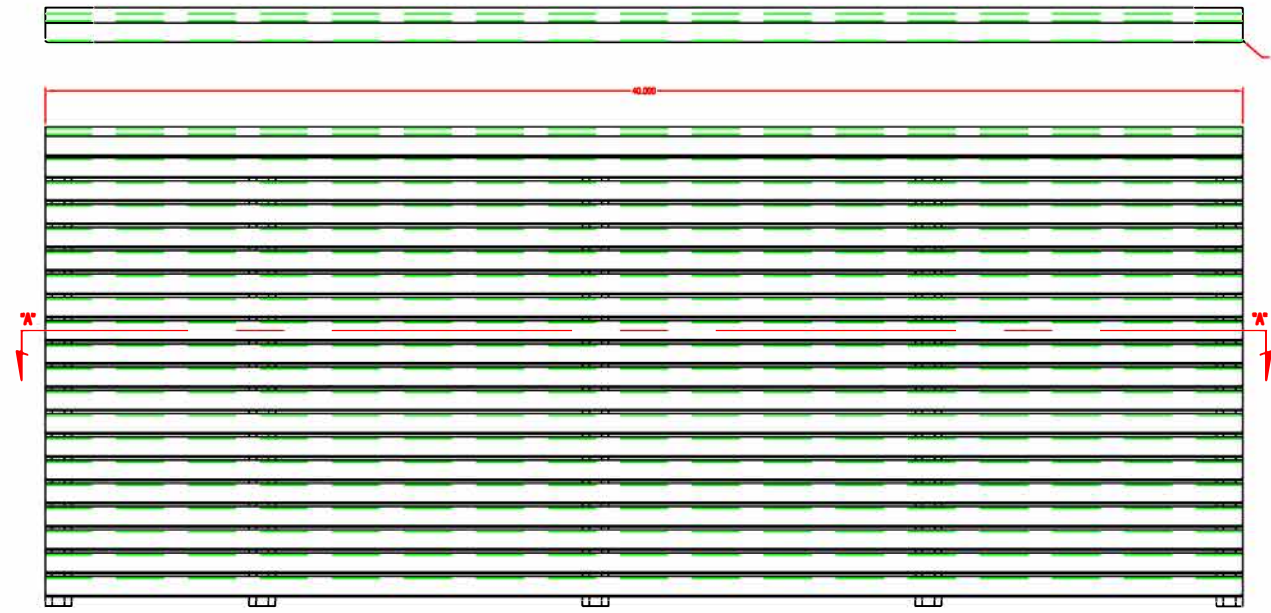

ALL LOWER CORNERS TO BE ROUNDED

10-24 INSERT
4 - PLACES

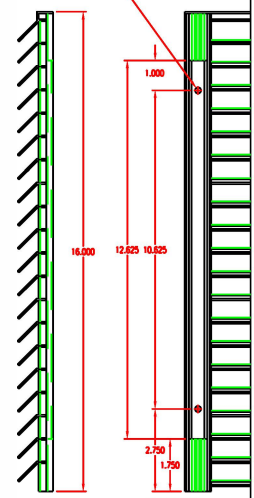

VIEW 'X'

- NOTES:
1. MATERIAL - ANODIZED EXTRUDED ALUMINUM
 2. EACH LOUVER ASSEMBLY IS BE SUPPLIED WITH THE FOLLOWING INCLUDING HARDWARE:
FOUR (4) 10-24 X 1" LONG STUB (NEED' FOR THREADED INSERT IN FRAME)
FOUR (4) 10-24 HEX NUTS
FOUR (4) 7/32" U.S. FLAT WASHER
 3. LOUVER BLADES HING TO BE ROUNDED.

PART NO. 800962

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. DO NOT SCALE DRAWING.
FINISHING TOLERANCE UNLESS OTHERWISE SPECIFIED:
LINEAR - FRACTION ± 1/32"
LINEAR - DECIMAL ± .005
ANGULAR ± 1.0°

Applied Comfort

PART NAME: LOUVER, PTAC (40" SLEEVE)
MATERIAL: ANODIZED EXTRUDED ALUM.
DWN. S.S.: SCALE: N.T.S. DRG. SIZE: C
APPL. DATE: 12APR2004 REV. NO.: 00
SHEET # 1/1 DWN. NO. G-800952

REV.	DATE	CHANGES	DRN.	APP'D.	CHK. NO.
00	12APR2004	ISS'D FOR PRODUCTION	S.S.	04007	