


INSTALLATION GUIDE FOR Applied Comfort EA, RS, and ES Chassis




August 2013

Applied Comfort's EA, RS, ES chassis are designed for new construction or to retrofit into 44.875" x 16.375" sleeves manufactured by McQuay, Remington, Singer and others.

EAEC Electric Heat
EAWC Hydronic Heat

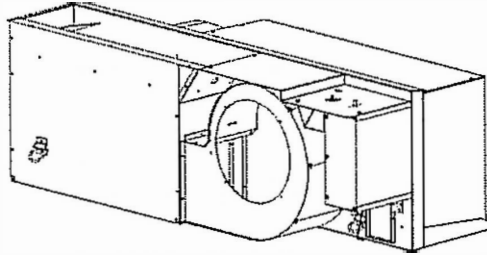


RSHP Heat Pump
ESEC Electric Heat

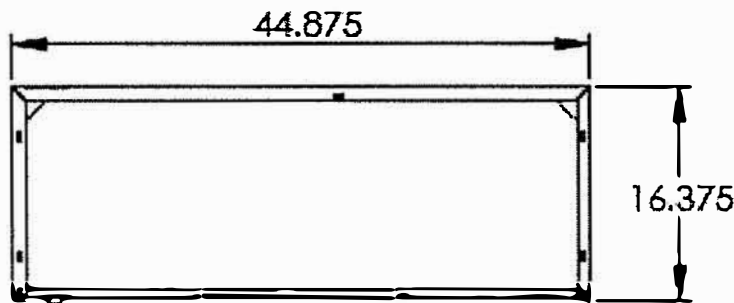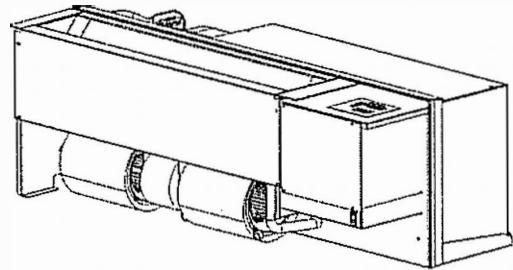


There are 2 types of 44.875 x 16.375 sleeves – OPEN BOTTOM (otherwise known as Bottom Return or "RS" sleeves) and SOLID BOTTOM (otherwise known as "EA" sleeves).

SOLID BOTTOM SLEEVE

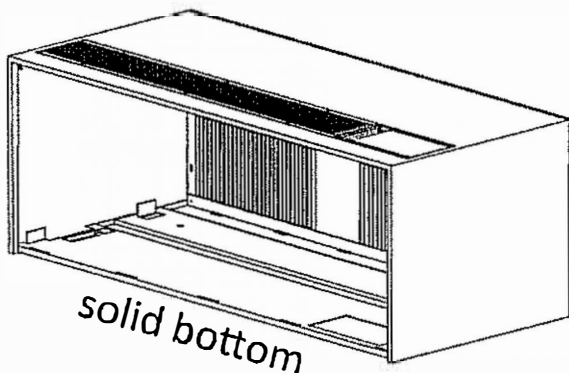


OPEN BOTTOM SLEEVE

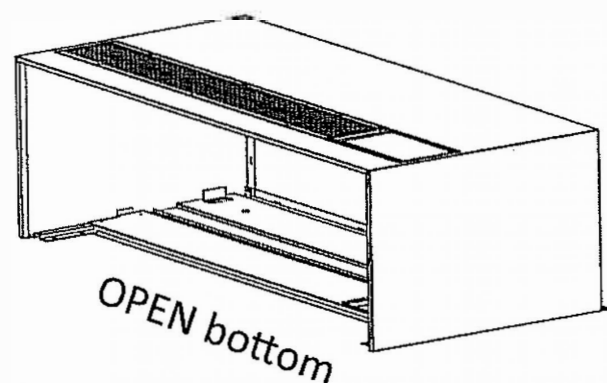

When installing EA, RS, and ES replacements, ensuring proper evaporator airflow is critical. The following 2 pages describe the front panels and retrofit kits that are available to ensure proper installation depending on the combination of sleeve type (Solid or Open Bottom) and desired chassis type (EA Electric, RS Heat Pump, ES Electric).


Please call us at Applied Comfort anytime you would like to discuss the options. 1-877-227-7822

SOLID BOTTOM SLEEVE

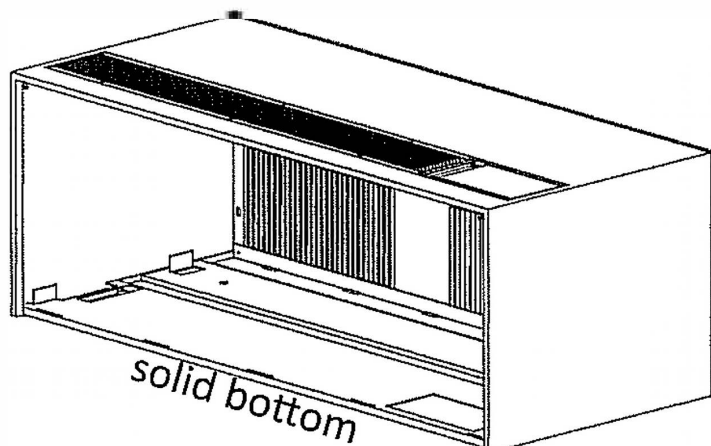

EA , RS, and ES chassis can be installed into original SOLID BOTTOM sleeves, if the correct accessories are used. The Solid Bottom sleeves were the dominant type made by McQuay, Singer, Remington – solid except for a hole for power cords.


EAEC Electric Heat
EAWC Hydronic Heat

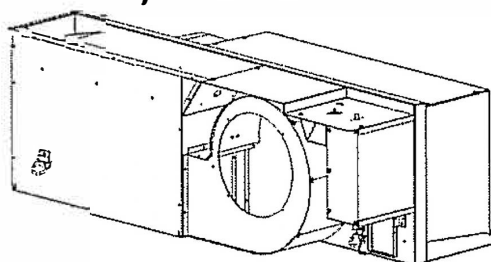

Applied Comfort's EA is designed to function with the original EA front covers (McQuay, Singer, Remington) with air return around the entire periphery of the front cover. We also offers 2 optional covers:




ACCEAFTCOVERPREMIUM -- premium double panel design with double insulation, free front airflow and superior sound suppression.

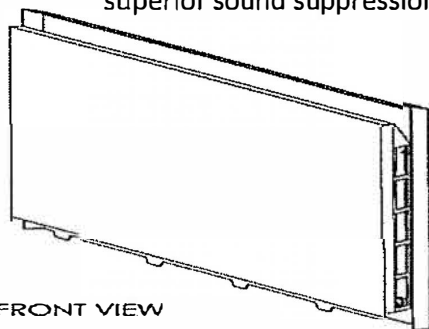

FRONT VIEW


ACCEAFTCOVERSIMPLE -- simple single panel design with grille cuts directly on front panel as shown, with less sound suppression, but at a lower cost.

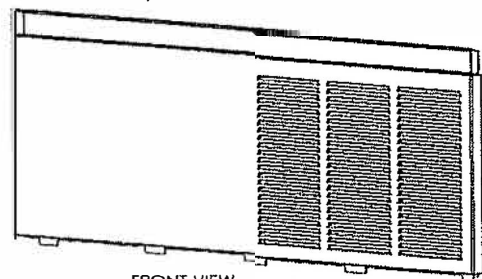

FRONT VIEW




RSHP Heat Pump
ESEC Electric Heat

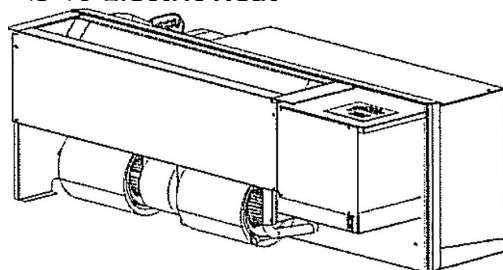

Applied Comfort's RS & ES can be installed into a SOLID BOTTOM sleeve if the ACCRSEARETROFITKIT Conversion kit is completely installed into the existing wall sleeve.




Conversion kit includes a front panel with premium double panel design with double insulation, free front airflow and superior sound suppression.

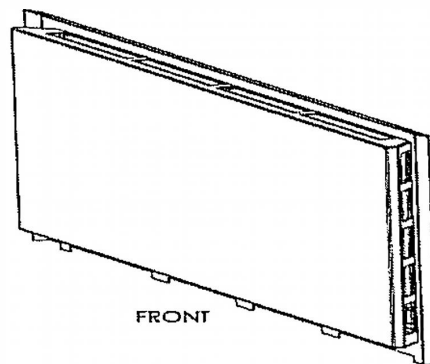

FRONT


This cover, in addition to the unrestricted open-full-width room air outlet grille and door assembly, forms the bulk of the ACCRSEARETROFITKIT.

OPEN BOTTOM SLEEVE

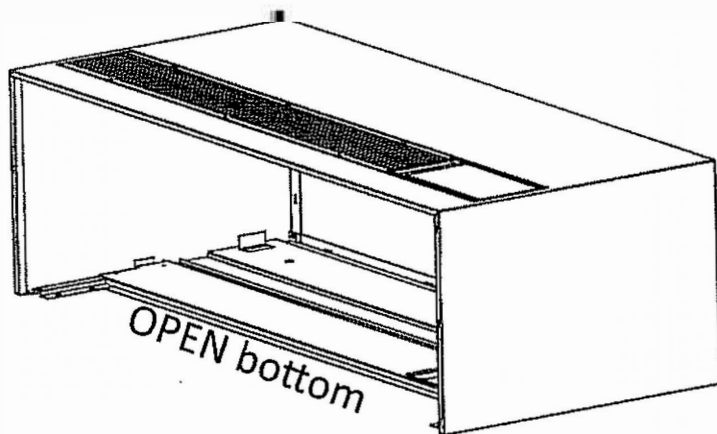

The OPEN Bottom sleeves (open on the first 6" of the sleeve facing the room) were made by McQuay, Singer, Remington to provide bottom-return airflow for the original RS Heat Pump designs.


EAEC Electric Heat
EAWC Hydronic Heat

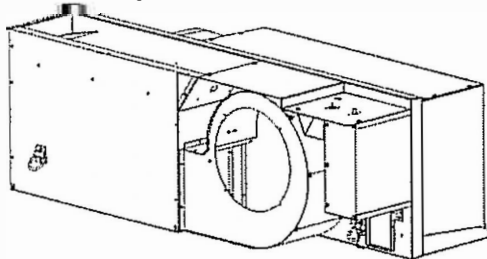


EA's are designed to function with OPEN BOTTOM sleeves if ACCEARSRETROFITPREM is installed.



ACCEA_RSRETROFIT_PREMIUM – consists of a blankout plate to close off the open bottom of the sleeve, + premium front panel of double panel design with double insulation, free front airflow and superior sound suppression.

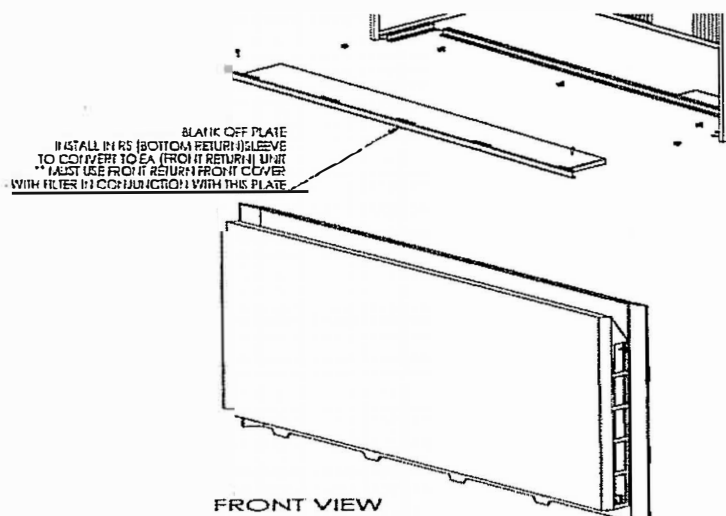


RSHP Heat Pump
ESEC Electric Heat

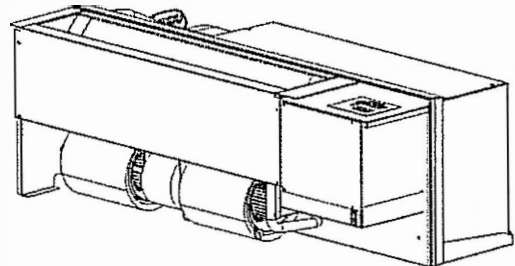

RS and ES chassis can be installed directly into original OPEN BOTTOM sleeves with original covers. The following replacement cover is also available to replace worn out original panels.



ACCRS_FTCOVER_BOTTOMFL – solid panel (no airflow) with insulation – this panel can ONLY be used when installing into an open bottom sleeve with free airflow through bottom of sleeve.

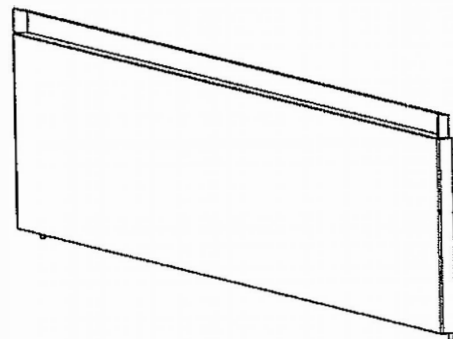

Note that an ACCEARSRETROFITSIM is also available – it is a less costly RETROFIT Kit utilizing the simple single panel cover but with less sound suppression.